

DELTA®

HIGH PERFORMANCE AIR & MOISTURE BARRIERS

DÖRKEN

DELTA®-DRAIN

The direct route for re-directing ground water.




High Performance Drainage for Residential and
Light Commercial Foundations.



Reliable Long Term Protection:

DELTA[®]-DRAIN

For Horizontal and Vertical Drainage Applications.

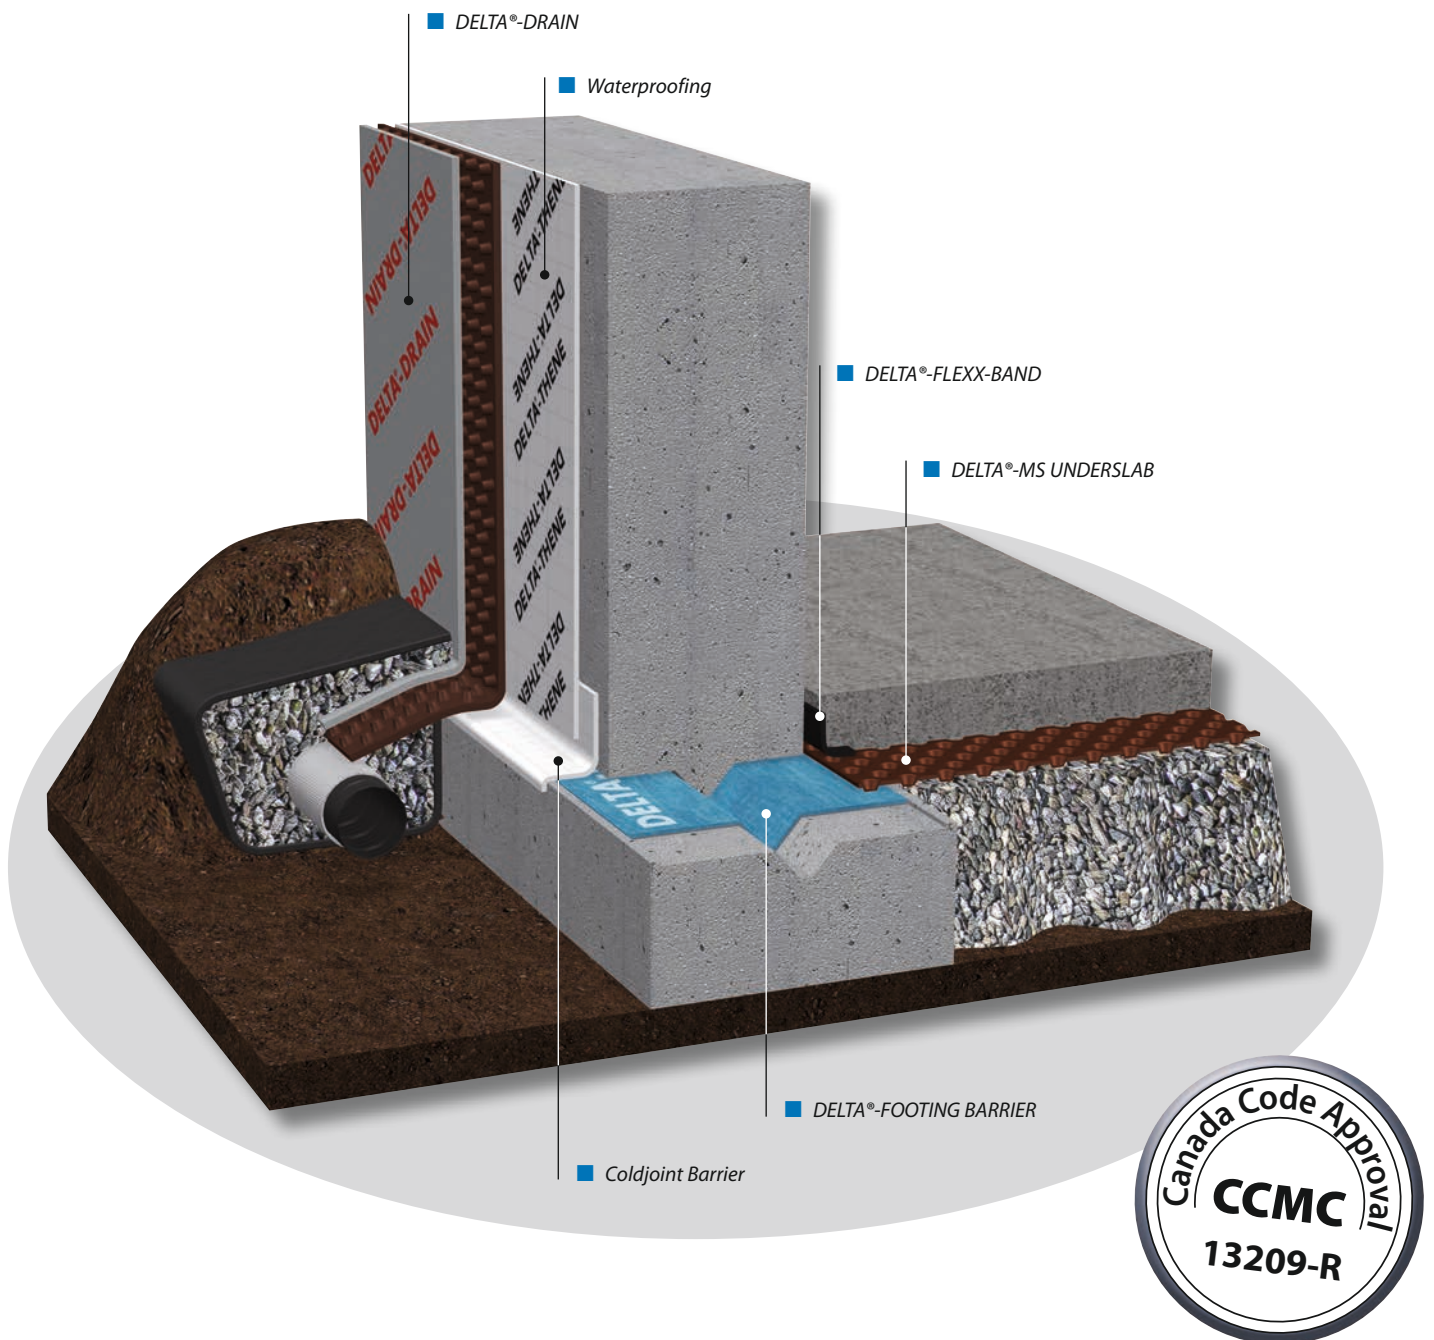

DELTA[®] quality branded products made by Dörken.



- Drains water away from foundation wall.
- High drainage capacity.
- Prevents build-up of hydrostatic pressure.
- Highly effective protection layer for water-proofing.
- Special geotextile will not rot and prevents clogging of the flow passages.
- High compressive strength.
- High impact resistance, high chemical and environmental stress crack resistance.
- Unaffected by environmental influences, like acidic soils or alkalinity (concrete).
- Contains 100 % recycled core protected on both sides with virgin HDPE for superior durability.
- Easy to install.
- Exclusive dimple pattern allows for easy corner installation.
- 8' size rolls for fewer material overlaps, less seams, less labor.
- For horizontal and vertical applications.
- Approved by the National Building Code (CCMC 13209-R)

Technical Data Overview:

Color	drainage core: chocolate brown, geotextile: grey
Material	drainage core: recycled & virgin HDPE, geotextile: PP
Dimple height	5/16" (8 mm) ASTM D6364-06
Compressive strength	approx. 5,200 psf (250 kN/m ²) ASTM D6364-06
Water penetration resistance (core)	>120 psi (815 kPa) Watertight AATCC 127-1995
Flow rate / unit with	5.2 gal/min/ft (65 l/min/m) ASTM D4716-08 @ hydr. grad. 1.0; 180 kPa
Flow rate / unit with	4.1 gal/min/ft (17.4 l/min/m) ASTM D4716-08 @ hydr. grad. 0.1; 180 kPa
Application Temperature	-22° F to +176° F (-30° C to +80° C)
Chemical properties	Excellent chemical resistance, resistant to root penetration
Toxicity	non-toxic, non-polluting
Roll dimensions / weight	6' x 65'-7" (1.83 m x 20 m) 60 lbs (27.2 kg) 8' x 65'-7" (2.45 m x 20 m) 73 lbs (33.1 kg)
Installation depth	up to 12' (3.7 m)
Service life expectancy	>25 years (at pH between 4 and 9 and temperature below 77° F / 25° C). Do not expose to UV light for more than 30 days.



DELTA®-Accessories for DELTA®-DRAIN.

Dörken makes your life easier – systematically.

You are sure to appreciate these handy DELTA®-Accessories:



DELTA®-FAST'ner
multistud fastener for
the secure attachment
of DELTA®-DRAIN.




DELTA®-MOLDSTRIP
used at terminations of
DELTA®-DRAIN.




DELTA®-SEALANT
elastic sealing com-
pound used at overlaps
and penetrations.



**DELTA®-SCREW
FAST'ner**
used to fasten DELTA®-
DRAIN to perimeter insu-
lation.



**DELTA®-DRAIN
PROFILE**
termination edge for
DELTA®-DRAIN over
perimeter insulation.



DELTA®-GRIP FAST'ner
attachment aid for
perimeter insulation
over waterproofing.

DELTA®



DÖRKEN

Dörken Systems Inc.
4655 Delta Way
Beamsville,
ON L0R 1B4, Canada
Tel.: +1 (905) 563 3255
Fax: +1 (905) 563 5582
info@dorken.com
www.dorken.com

A Dörken Group company

The information printed in this brochure reflects product information and specifications at the date of printing. The manufacturer reserves the right to make changes when necessary.

All rights reserved.

DELTA®-branded quality products manufactured by Dörken.

Visit us on:



LinkedIn



Twitter



YouTube

