

TECHNICAL DATA SHEET

DELTA®-TILAXX

MATERIAL


Solvent-free construction adhesive and sealant. Permanently elastic sealing compound suitable for use with DELTA® membranes. Also adheres to other common building elements.

- Solvent-free
- Quick-setting (depends on temperature and humidity)
- Aggressive tack provides increased adhesion.
- Adheres to:
 - Glass
 - Aluminum
 - Zinc
 - Steel
 - Paints and primers
 - Wood composites
 - Wood
 - Plastics
 - Clay roof tile

DELTA®-TILAXX contributes to the air and water tightness of the building enclosure by sealing overlaps (end laps and side laps) of DELTA® air and water-resistant barriers. DELTA®-TILAXX forms an exceptional bond to common construction materials, making it an ideal component to create continuity in air and water-tight wall and roof assemblies. DELTA®-TILAXX is part of DELTA® premium system accessories that complete a WRB / Air Barrier installation.

Technical Data

Product name	DELTA®-TILAXX
Color	Black
Material	Solvent-free construction adhesive and sealant
Packaging	12 cartridges / box
Cartridge size	310 ml
Coverage	approx. 7m/cartridge
Shelf life	12 months
Curing time	Skin formation after 25 minutes at 50% humidity
Installation temperature	+ 40 °F to + 90 °F (+ 5 °C to + 30 °C)
Temperature range	-40 °F to + 176 °F short term up to 248 °F (-40 °C to + 80 °C short term up to 120 °C)

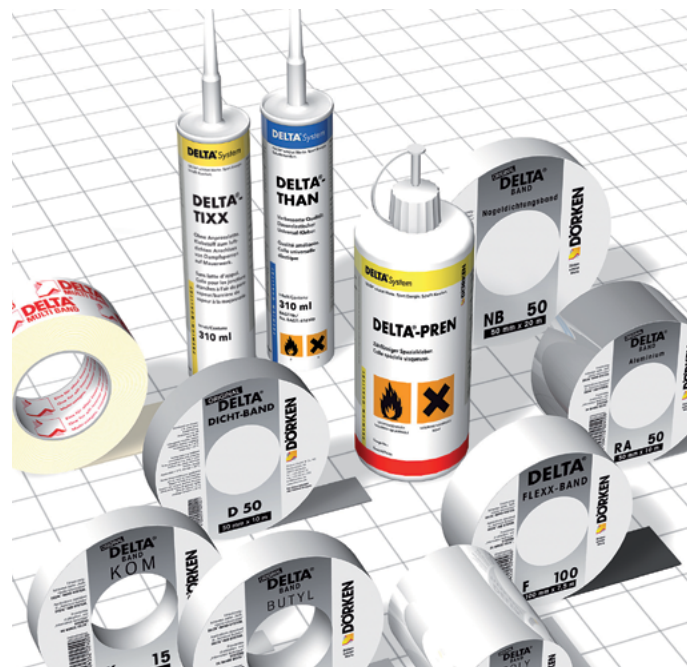

DELTA® products support sustainable and energy-efficient building practices, including efforts toward achieving LEED® certification (LEED® for New Construction & Major Renovations, LEED® for Core and Shell, LEED® for Existing Buildings and LEED® for Homes).

For technical support, call our technical support team at 1-888-4DELTA4 (1-888-433-5824) extension 326, or visit www.dorken.com.