

TECHNICAL DATA SHEET

DELTA®-DRAIN

Below Grade Foundation Drainage.

MATERIAL


A dimpled membrane made of special polypropylene (PP) and polypropylene non-woven TYPAR® geotextile. DELTA®-DRAIN polypropylene drainage core provides high compressive strength, impact resistance, and chemical and environmental stress crack resistance.

PROPERTIES

The product is comprised of a 2-layer geocomposite. The first layer is the polypropylene drainage core that drains incoming water freely to the footing perimeter drain, thus preventing the build-up of hydrostatic pressure against the waterproofing layer. It also acts as a highly effective protection layer for the waterproofing material during backfill operations. The second layer is a heatbonded PP geotextile. The rot-proof geotextile is highly water permeable and prevents clogging of the flow passages in the drainage core.

APPLICATION

DELTA®-DRAIN is unrolled against the foundation wall. It is typically used in conjunction with liquid or sheet applied waterproofing. Install the top edge of drain board at grade level. Place the bottom edge close to the perimeter footing drain. DELTA® Accessories are available for easy fastening and termination details.

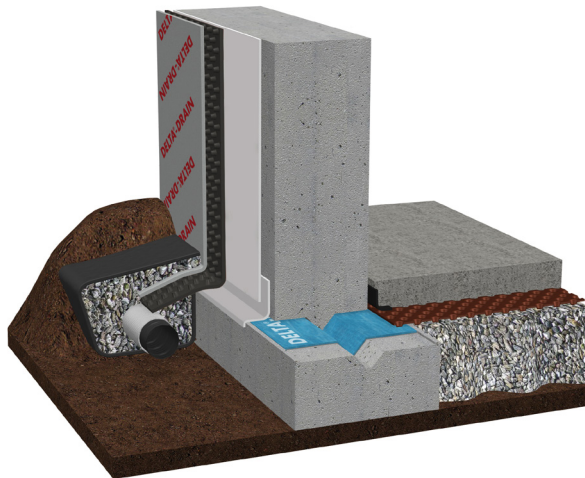

Technical Data

Product name	DELTA®-DRAIN	
Color	drainage core: black; geotextile: grey	
Material	drainage core: polypropylene geotextile: polypropylene	
Dimple height	5/16" (8 mm)	ASTM D6364-06
Compressive strength	approx. 5,200 psf (250 kN/m ²)	ASTM D6364-06
Air-gap volume between dimples	0.13 gal/ft ² (5.3 l/m ²)	ASTM D4716-08Z
Water penetration resistance (core)	> 120 psi (815 kPa) Watertight	AATCC 127-1995
Flow rate / unit width @ hydr. grad. 1.0; 180 kPa	5.2 gal/min/ft (65 l/min/m)	ASTM D4716-08
Flow rate / unit width @ hydr. grad. 0.1; 180 kPa	1.4 gal/min/ft (17.4 l/min/m)	ASTM D4716-08
Temperature range	-22°F to +176°F (-30°C to +80°C)	
Chemical properties	Excellent chemical resistance, resistant to root-penetration, rot-proof	
Toxicity	non-toxic, non-polluting	
Weight per unit area	approx. 21 oz/yd ² (715 g/m ²)	ASTM D5261-92
Roll dimensions / weight	6' x 65' 7" (1.83 m x 20 m) 54 lbs (24.4 kg)	
	8' x 65' 7" (2.45m x 20m) 71 lbs (32.2 kg)	
Installation depth	up to 12' (4 m)	
Service life expectancy	> 25 years (at pH between 4 and 9 and temperature below 77°F / 25°C). Do not expose to UV light for more than 30 days.	
DELTA® Accessories	DELTA®-MOLD STRIP DELTA®-FLASH DELTA®-FAST'ner DELTA®-DRAIN PROFILE DELTA®-SCREW FASTENER DELTA®-SEALANT	

DELTA® products support sustainable and energy-efficient building practices, including efforts toward achieving LEED® certification (LEED® for New Construction & Major Renovations, LEED® for Core and Shell, LEED® for Existing Buildings and LEED® for Homes).

For technical support, call our technical support team at 1-888-4DELTA4 (1-888-433-5824) extension 326, or visit www.dorken.com.